



Data Sheet

Tactical Telescopic Mast

02-00898-40 | 02-00899-40 | 10m or 10-15m

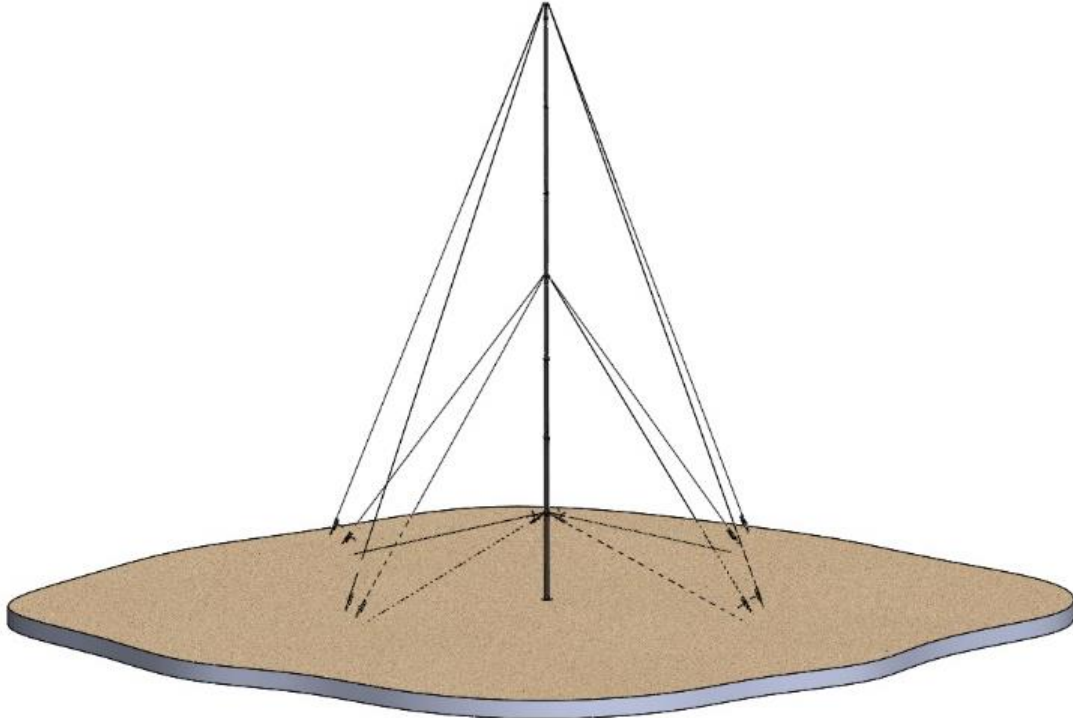


Figure 1. Telescopic Mast Assembly

The Lecom® 02-00898-40 and 02-00899-40 are tactical telescopic mast ideal for temporary or mobile communication installations. It has been designed for easy operation and user-friendly features unlike any mast seen today. 3 height modes are available: 10m, 12m and 15m.

Product Information

Lightweight and rugged in design the 10 and 12-15m tactical telescopic mast is built to last. With the custom Lecom® lock mechanism, this mast can be quickly and easily deployed and retrieved.

Made from blackened, high grade aluminium and designed to meet MIL-STD 810H, this mast can withstand harsh weather conditions including wind speeds of up to 100-120 km/h.

With four-way guying and snap lock mechanisms the mast has a maximum overhead load of 100N force with SF=3.

Made to suit a variety of antenna operations, there is no better mast solution than the 02-00898-40 and 02-00899-40.



Data Sheet

Tactical Telescopic Mast

02-00898-40 (10m) | 02-00899-40 (12-15m)

Key Characteristics

Height	10 m	15 m
Guy Radius	5 m	7.5 m
Number of Guys	4 way guying x 3 levels	4 way guying x 4 levels
Mast weight	15.6 kg	19.6 kg
Packed weight	23kg	29 kg
Wind Rating	120 km/h	100 km/h

Tool Requirements

For ease of installation, the following tools are recommended.

Hammer Sledge

Allen Key 8mm